

RIGID - IMC

FS & FD Cast Device Boxes

Features:

- Tapered threads (NPT with integral bushings)
- Internal grounding screw
- Suitable for use in wet locations when used with FSFDCM1 cover and FSFDCG gasket
- Malleable iron is suitable for concrete use

Standard Materials:
Malleable iron

Standard Finish:
Zinc plated


Applicable Third Party Standards:
UL Standard: 514A
NEMA: FB-1



FS Type




FD Type

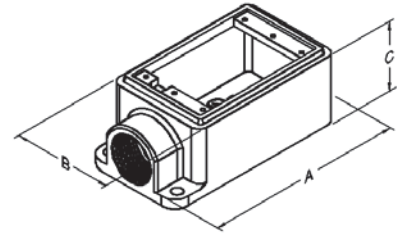

FSC Type



FDC Type

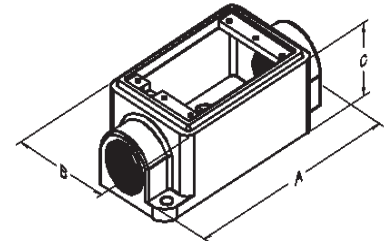

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
FS50	1/2"	5-1/4"	2-15/16"	2-1/8"	24	221.9
FS75	3/4"	5-1/4"	2-15/16"	2-1/8"	24	233.5
FS100	1"	5-1/4"	2-15/16"	2-1/8"	24	242.8
FD50	1/2"	5-1/4"	3"	2-7/8"	16	278.1
FD75	3/4"	5-1/4"	3"	2-7/8"	16	272.8
FD100	1"	5-1/4"	3"	2-7/8"	16	283.7
FSC50	1/2"	6-1/16"	2-15/16"	2-1/8"	24	234.4
FSC75	3/4"	6-1/16"	2-15/16"	2-1/8"	24	240.6
FSC100	1"	6-1/16"	2-15/16"	2-1/8"	24	250.2
FDC50	1/2"	6-1/16"	3"	2-7/8"	16	313.1
FDC75	3/4"	6-1/16"	3"	2-7/8"	16	93.8
FDC100	1"	6-1/16"	3"	2-7/8"	16	305.6



RIGID - IMC

FS & FD Cast Device Box Covers & Gasket

Features:

- Each cover comes with captive screws
- FSFDCSI & FSFDCAI - Raintight if used with FSFDCGI

Standard Materials:

- FSFDCSx - Steel
- FSFDCAx - Aluminum
- Gasket - Neoprene rubber

Standard Finish:

Zinc plated

Applicable Third Party

Standards:
CSA Standard: C22.2
No. 42.1
UL 514D



FSFDCS1

Blank cover for splices and taps
No device
Raintight if used with FSFDCGI
Sheet steel



FSFDCS2

Unguarded square handle switch
Sheet steel



FSFDCS3

Duplex receptacles
Sheet steel



FSFDCS4

GFI receptacles
Sheet steel

Steel

CATALOG NUMBER	PCS/BOX	WEIGHT PER C
FSFDCS1	25	18.1
FSFDCS2	25	15.6
FSFDCS3	25	12.5
FSFDCS4	25	11.9

Aluminum

CATALOG NUMBER	PCS/BOX	WEIGHT PER C
FSFDCAI	25	9.4



FSFDCAI

Blank cover for splices and taps
No device
Raintight if used with FSFDCGI
Sheet aluminum

Gasket

CATALOG NUMBER	PCS/BOX	WEIGHT PER C
FSFDCGI	25	3.5



FSFDCGI

Gasket - Raintight if used with FSFDCS1, FSFDCAI & FSFDCMI
Neoprene rubber



RIGID - IMC FITTINGS